



## 36W Surface 2x2 Panel Light

### Optical Parameters


Color Temperature	• 6500°K
Optics Beam Angle	• 110° ±2°
Light Source Type	• LED
LED Make	• Osram /Samsung/ Seoul/ Brigelux
Total Lumens	• ≥4000lm
Lumens /Watt	• ≥120 lm/W
CRI	• ≥ 80
Working Temperature	• 5°C to +50°C

### Mechanical Parameters

Application	• Indoor Application
Housing Material	• CRCA Sheet
Product Dimension	• 600x600mm ±2mm
Body Color	• White Powder Coat >50Micron
Glass	• High Efficiency Prismatic Diffuser
IK Rating	• IK 02
Mounting Type	• Surface Mount Type
IP Rating	• IP 20


### Electrical Parameters

Rated Power (W)	• < 36W
Control Gear Input Voltage Range	• 120V AC to 270V AC
Control Gear Input Rated Voltage	• 230V AC
Power Factor	• >0.95
Frequency	• 50Hz / 60Hz
Control Gear Surge Protection	• 4KV (With Driver )
Electrical Safety Class	• Class 1
Burning Life at L70@ 50 °C	• 50,000 hrs
THD	• <10%
Control Gear Efficiency	• >85%

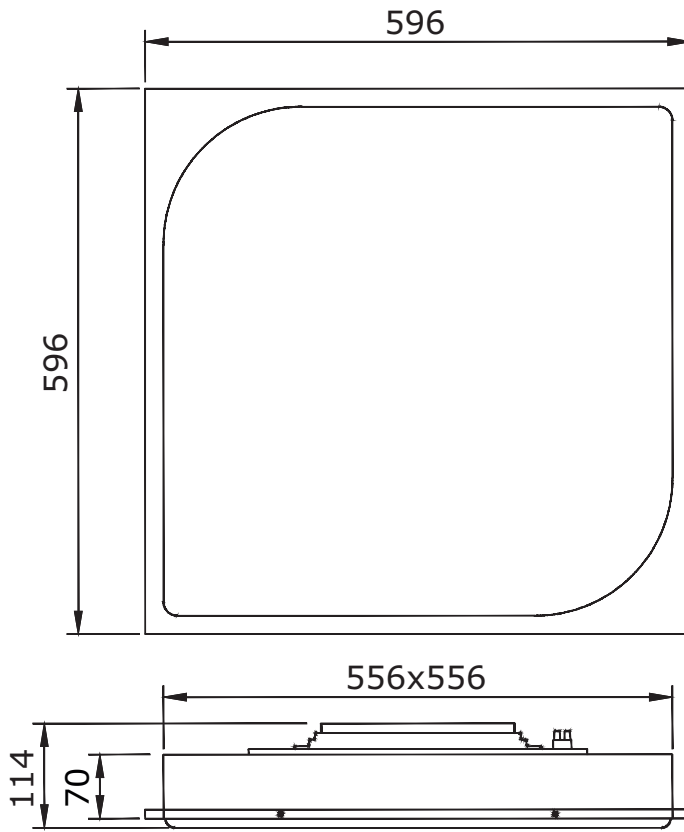

36W Panel Light 2x2

Item Name : 2x2 Panel Light 36W			
Dimensions:			
Length	: 596mm	±2mm	
Width	: 596mm	±2mm	
Height	: 70mm	±2mm	

		INSTAPOWERR LTD. 103, Raipur Industrial Area, Bhagwanpur, 15.5Km, Roorkee-Dehradun Highway, Uttarakhand-247661 India	
PREPARED BY	REVIEWED BY	APPROVED BY	
PAWAN	A.P	M.S	
CUSTOMER APPROVAL:	TITLE	GADRAWING (2X2 Panel Light-36W )	
	23.09.2025	FIRST ISSUE	
No.	DATE	DESCRIPTION	DWG. No.
		REVISION	DOC. NO.