


AM 745 series products are powerful lights made of die-casting aluminum housing, built-in power supply and driver, independent heat dissipation system, rotatable & fixable bracket support, available for a series of optical lens, and equipped with adjustable glare shield. Controllable via the DMX512 system, with creative intelligent dimming technology, the light color of the spotlight is softer and widely suitable for the application of landscapes, bridges, exterior facades of buildings and etc.



Code - 41 45 01.102.08

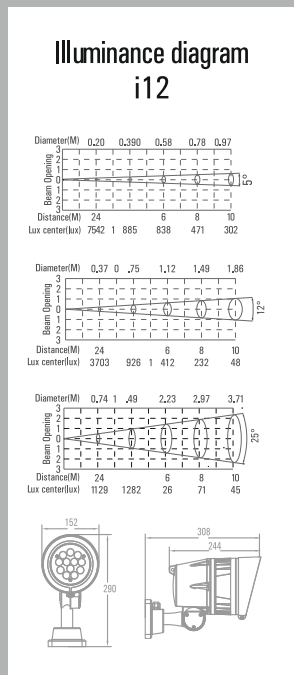

Input Voltage

Input Voltage	100 ~ 277 V AC
Max. Power	38W
Power Factor	> 0.9
Lumen	1200lm
Peak Intensity	14755cd (12°)
LED Qty	12pcs(4R + 4G + 4B)
Optics	12° (5°, 25°, 45°)
DMX control channels	RGB 0-100% dimming
Interface	DMX
Controllable sections	1
Mains connection	3m cable(input only)
Data connection	3m cable(input + output)
IP Rated	IP66
Operation temperature	-40°C ~ 45°C (operating)
Housing material	Die-cast aluminium
Housing color	Off-white
Dimensions	244x152x308mm
Weight	4.25kg

● Anti-thunder shock protection design

● AC200-277V wide voltage design