


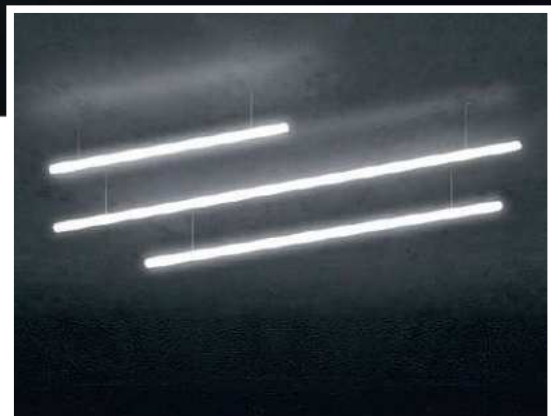

CCT	• 3000K / 4000K / 6000K
IP Rating	• 20/66
Luminous Efficacy	• 90 l m/W
CRI	• >90
Beam Angle	120°
Life Span	• 50,000 Hrs
Control Gear Mount	• External
Finishes	• Anodized / Powder Coated

Code	• 139 107 07.1.10 / .15 / .20
Power Consumption (per mtr)	• 10W / 15W / 20W
Product Dimensions (LxWxH)	• 3657 x 17 x 15 mm
Power Supply	• Constant Voltage
Input Voltage	• 90-270 V AC
Power Factor	• >0.95
Efficiency	• >85%
Dimmable	• Available
DC Voltage	• 12V

- Ideal for Hospitals, Laboratories, Offices
- Recess/Surface Mounted
- Attractive aesthetics
- Glare free lighting
- Aluminium Pressure Die Cast
- Tested as per IS 10322 (Part 5/Sec 2): 2012
- Construction & Material : Extruded Aluminium